

**CH**



## Premium trolley jack 2000 to 4000 kg

### FEATURES

- Robust design and great stability
- Foot pedal for fast approach
- Overload safety valve
- Silent polyamide wheels
- Rubber support included
- Integrated tool tray on top of the jack

**CONFORMS TO  
EN1494 STANDARDS**



**2  
TONS**

**3  
TONS**

**4  
TONS**

**CH2T ♦ CH3T ♦ CH4T**



**2  
TONS**

**CH2TS**



**2  
TONS**

**CH2TX**

Extra low chassis



**CH2TS**  
Mechanical locking  
at 320 mm

Model		CH2T	CH2TS	CH2TX	CH3T	CH4T
Load capacity	kg	2000	2000	2000	3000	4000
Min. height	mm	95	95	70	95	140
Max. lift height	mm	470	470	450	470	530
Tiller length	mm	760	760	760	800	835
Chassis dimensions (LxWxH)	mm	850x360x135	850x360x135	850x360x135	850x360x135	1075x360x192
Weight	kg	35	37,5	39	36	48,5

# CH




## Premium heavy duty trolley jack 6000 to 15000 kg

### FEATURES

- Suitable for all types of commercial, agricultural or industrial vehicles
- Great maneuverability
- Foot pedal for fast approach
- Lowering control system
- Overload safety valve
- Ergonomic handle with rubber protection

15  
TONS

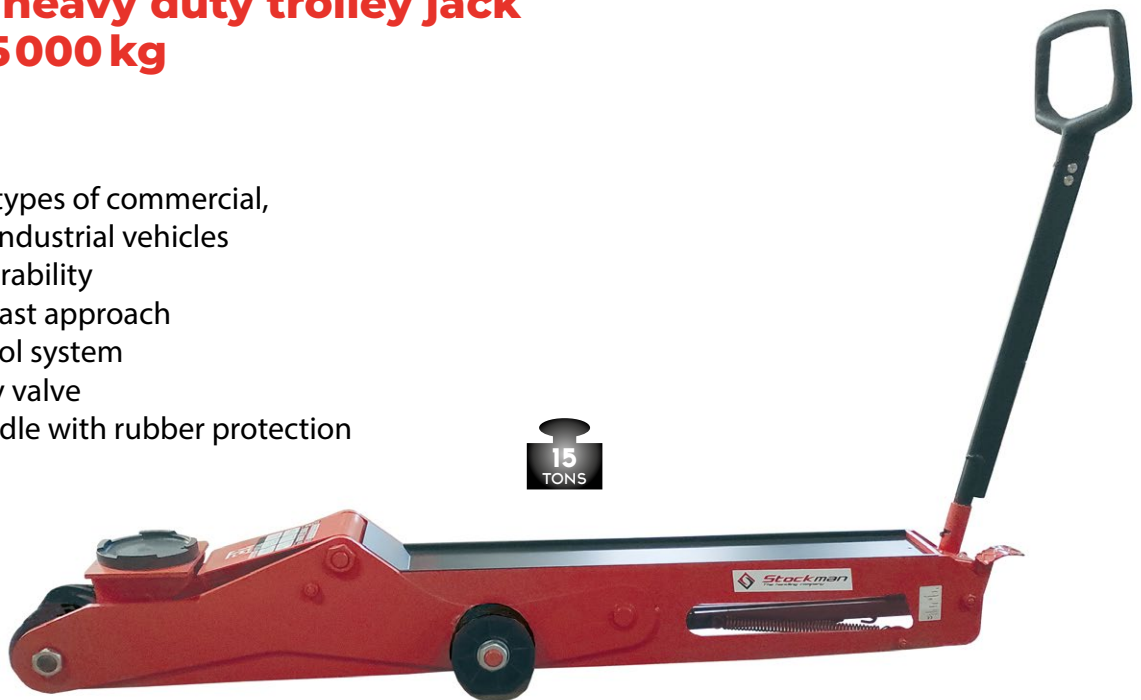

CONFORMS TO  
EN1494 STANDARDS

6  
TONS



CH6T

CH15T

Model		CH6T	CH15T
Load capacity	kg	6000	15000
Min. height	mm	170	195
Max. lift height	mm	580	600
Tiller length	mm	965	1105
Chassis dimensions (LxW x H)	mm	1250x414x220	1575x375x265
Weight	kg	81	145