Photos and dimensions are not contractual. The manufacturer reserves the right to make any modification without notice.

HCT






Double cylinder rod bottle jack 4000 and 12000 kg

FEATURES

- · Heat-treated cylinder rod and screws
- Built-in overload valve
- Welded base (not screwed) to prevent the risk of leakage
- Wide base increases stability and user safety
- Extension screw and carrying handle come standard on model HC120T



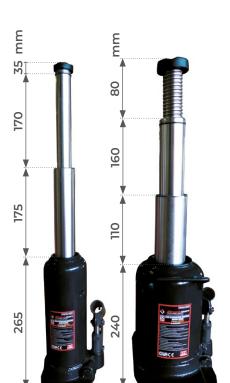



HC40T

HC120T



Welded base (not screwed) to prevent any risk of leakage

Model		HC40T	HC120T
Load capacity	kg	4000	12000
Dimensions (LxWxH)	mm	128 x 124 x 265	186 x 175 x 230
Minimum height	mm	265	240
Elevation 1 cylinder	mm	175	110
Elevation 2 cylinders	mm	170	160
Adjustable height	mm	35	80
Net weight	kg	7,1	14,9
Gross weight	kg	7,5	15,2



Heat-treated cylinder rod and screws



Extension screw comes standard on model HC120T