


HM



Hydraulic toe jack 5000 to 25 000 kg

FEATURES

- Solid and compact steel construction
- Epoxy coating
- Discharge screw guaranteeing controlled and safe load lowering
- 180° rotation pump lever
- Designed for heavy load lifting
- Low ground clearance lifting
- Load can lifted with the head of the jack
- Can be used in any position
- Caster wheels included on model HM250

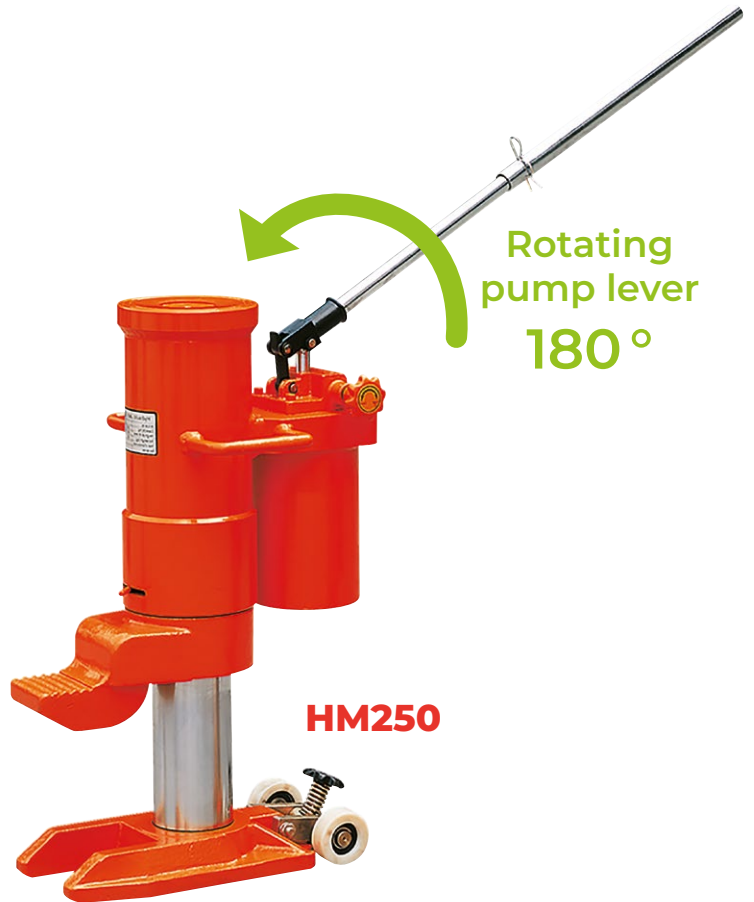





HM250



HM50



HM100

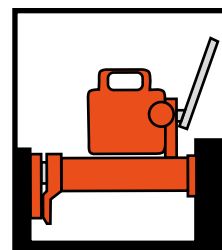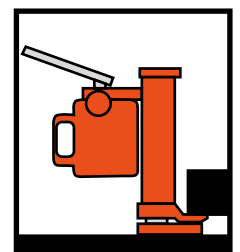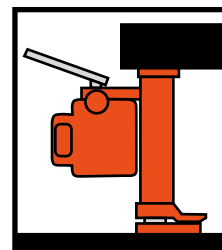

Model		HM50	HM100	HM250
Load capacity	kg	5000	10000	25000
Height of leg elevation	mm	25 - 230	30 - 260	58 - 273
Height of head elevation	mm	368 - 573	420 - 650	505 - 720
Necessary force	kg	3,8	4	4
Weight	kg	25	35	102