

# HT250/PRIM2

Graphite  
SERIES




## Premium steel telescopic hand truck 250 kg

### FEATURES

- Custom frame design for great stability and balance
- Robust design with reinforced frame
- Easy-grip ergonomic handle
- Excellent rolling performance
- Extendable frame (1600 - 2160 mm)
- Stockman patented TPR handle grip
- Large-diameter wheels glide over curbs and ensure a smooth rolling



**DOUBLE SEALED BALL BEARINGS**



**SCRATCH-RESISTANT HAMMER PAINT**



**REINFORCED WHEEL LOCK**

**4**

**MODELS AVAILABLE**



**RG**

High-quality pneumatic wheel with high density PP body



**RSB**

High-quality non-marking silent blue elastic rubber wheel




**RSN**

High-quality silent black elastic rubber wheel



**RINC**

High-quality puncture-proof non-marking silent foam wheel

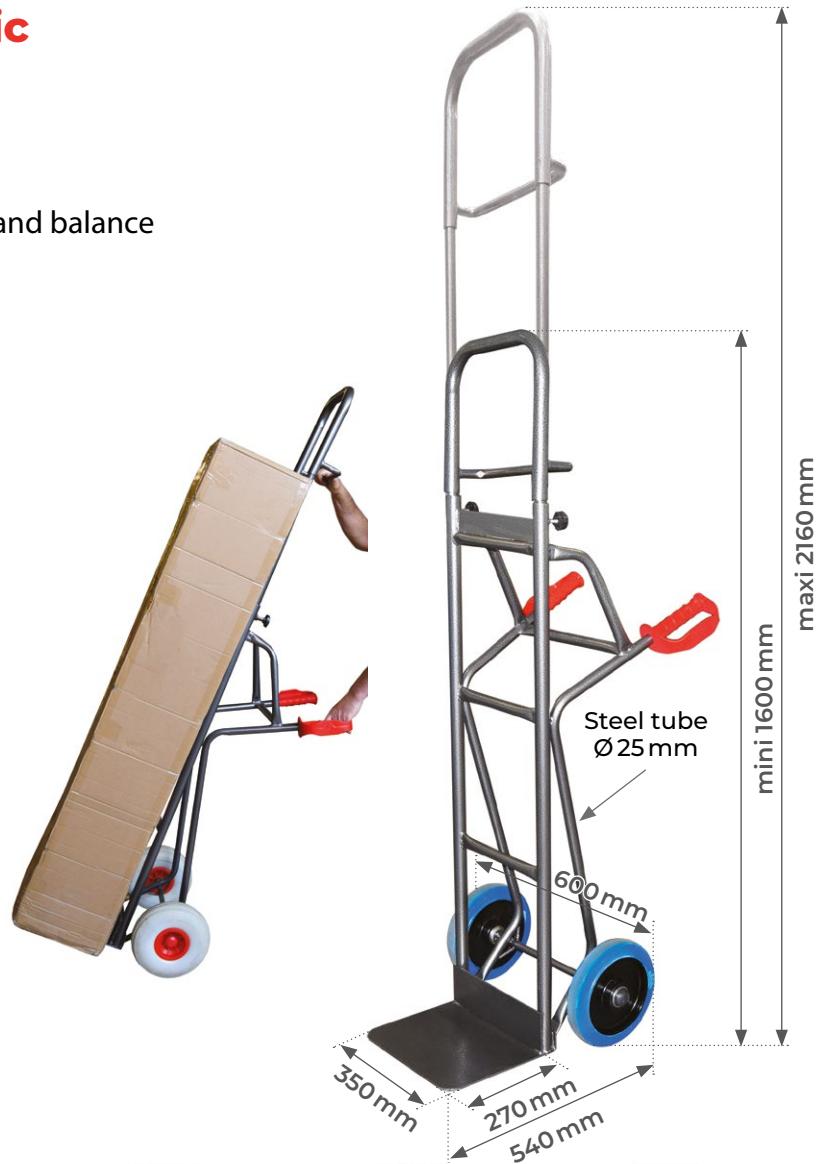

Model		HT250/PRIM2-RG	HT250/PRIM2-RSB	HT250/PRIM2-RSN	HT250/PRIM2-RINC
Load capacity	kg	250	250	250	250
Overall length	mm	600	600	600	600
Overall depth	mm	540	540	540	540
Overall height	mm	1600/2160	1600/2160	1600/2160	1600/2160
Nose plate type		fixed	fixed	fixed	fixed
Nose plate width	mm	350	350	350	350
Nose plate depth	mm	270	270	270	270
Type of wheel tires		pneumatic	non-marking silent blue elastic rubber	silent black elastic rubber	non-marking silent puncture-proof foam
Type of wheel hub		high density PP	polyamide 6	polyamide 6	high density PP
Type of bearings		double sealed ball bearing	double sealed ball bearing	double sealed ball bearing	double sealed ball bearing
Wheels	mm	Ø 260	Ø 250	Ø 250	Ø 260
Weight	kg	22	22	22	22