


HW



Electric lift table 1000 to 4000 kg

FEATURES

- Premium lift table
- Fitted with high-end components
- Bucher hydraulic electro-pump
- Excellent overall robustness
- Safety clearance to prevent trapping
- Shear protection
- Self-lubricated rollers and bushings
- Lowering speed control valve
- Hose burst valve

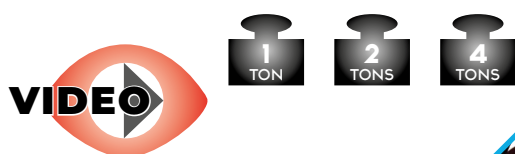

Safety trip bars

Solenoid valve
Bucher hydraulic electro-pump

BUCHER HYDRAULIC ELECTRO-PUMP



SAFETY TRIP BARS

HAND CONTROLLER WITH 4M CABLE



UPPER TRAVEL LIMIT SWITCH

Model 1000 kg		HW1001	HW1002	HW1003	HW1004	HW1005	HW1006
Load capacity	kg	1000	1000	1000	1000	1000	1000
Plate dimensions (LxW)	mm	1300x820	1600x1000	1700x850	1700x1000	2000x850	2000x1000
Base dimensions (LxW)	mm	1240x640	1240x640	1580x640	1580x640	1580x640	1580x640
Min / max lift height	mm	205/1000	205/1000	240/1300	240/1300	240/1300	240/1300
Raising time	s	20 - 25	20 - 25	30 - 35	30 - 35	30 - 35	30 - 35
Motor 380V / 50 Hz	kw	1,1	1,1	1,1	1,1	1,1	1,1
Weight	kg	160	186	200	210	212	223

Model 2000 kg		HW2001	HW2002	HW2003	HW2004	HW2005	HW2006
Load capacity	kg	2000	2000	2000	2000	2000	2000
Plate dimensions (LxW)	mm	1300x850	1600x1000	1700x850	1700x1000	2000x850	2000x1000
Base dimensions (LxW)	mm	1220x785	1220x785	1600x785	1600x785	1600x785	1600x785
Min / max lift height	mm	230/1050	230/1050	250/1300	250/1300	250/1300	250/1300
Raising time	s	20 - 25	20 - 25	25 - 35	25 - 35	25 - 35	25 - 35
Motor 380V / 50 Hz	kw	2,2	2,2	2,2	2,2	2,2	2,2
Weight	kg	235	268	289	300	300	315

Model 4000 kg		HW4001	HW4002	HW4003	HW4004	HW4005	HW4006
Load capacity	kg	4000	4000	4000	4000	4000	4000
Plate dimensions (LxW)	mm	1700x1200	2000x1200	2000x1000	2000x1200	2200x1000	2200x1200
Base dimensions (LxW)	mm	1600x900	1600x900	2000x900	2000x900	2000x900	2000x900
Min / max lift height	mm	240/1100	240/1100	300/1400	300/1400	300/1400	300/1400
Raising time	s	30 - 40	30 - 40	45 - 50	45 - 50	45 - 50	45 - 50
Motor 380V / 50 Hz	kw	2,2	2,2	2,2	2,2	2,2	2,2
Weight	kg	375	405	470	490	480	505

220 VOLT SINGLE-PHASE COMES STANDARD ON HW1001 AND HW1003 MODELS

IN OPTION



- Self-leveling function (when ordering, please specify the desired adjustment)
- 220 volts single-phase