

# ME-R



## Manual winch lifter 200 to 400 kg

### FEATURES

- Ready for use in seconds
- Robust compact design
- Invertible forks with adjustable width
- 2 x Ø 200 mm wheels for easy transport
- Two stabilizing arms on the base
- Anti-twist high strength lifting cable
- Spirit level for accurate leg frames leveling
- Manual lifting winch with automatic brake
- Stainless steel cable sheaves with bearings
- German certifications TÜV - GS - BGV D8
- Designed to be transported in a commercial vehicle
- Compact height and width when folded
- Triple independent safety mechanisms:  
manual winch with automatic brake,  
automatic anti-fall device,  
safety lock on each mast



Winch with  
automatic  
brake



Equipped  
with 8x casters and  
removable stabilizers




Three position  
adjustable wheels



Invertible fork frame  
for greater height



Up to 8m

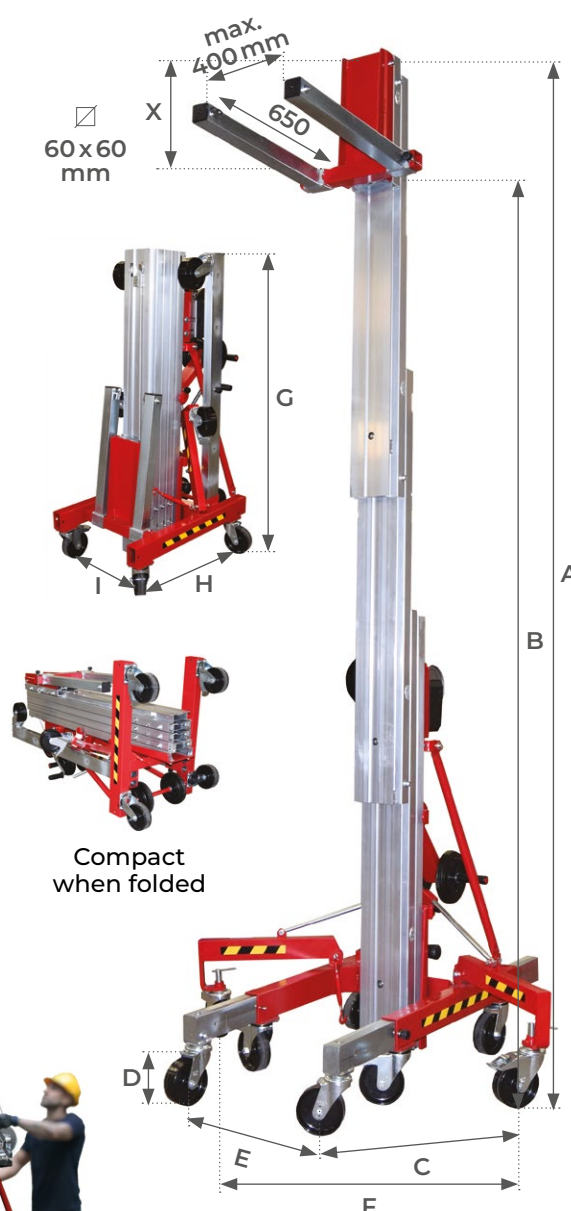

Compact  
when folded






| Model                             |     | A   | B    | C             | D   | E   | F    | G    | H    | I   | X   | Weight |
|-----------------------------------|-----|-----|------|---------------|-----|-----|------|------|------|-----|-----|--------|
| Load capacity in kg at CDG 300 mm |     | m   | m    | m             | mm  | mm  | mm   | mm   | mm   | mm  | mm  | kg     |
| ME-R5000B                         | 200 | 5   | 4,78 | +1,31 / -1,06 | 225 | 600 | 1450 | 1680 | 760  | 600 | 215 | 112    |
| ME-R6000B                         | 200 | 6   | 5,78 | +1,31 / -1,06 | 225 | 600 | 1450 | 1680 | 760  | 600 | 215 | 120    |
| ME-R4000C                         | 300 | 4   | 3,58 | +1,71 / -1,32 | 230 | 650 | 1600 | 1640 | 1000 | 650 | 270 | 141    |
| ME-R5000C                         | 300 | 5   | 4,58 | +1,71 / -1,32 | 230 | 650 | 1600 | 1640 | 1000 | 650 | 270 | 156    |
| ME-R6000C                         | 250 | 6   | 5,58 | +1,71 / -1,32 | 230 | 650 | 1600 | 1640 | 1000 | 650 | 270 | 175    |
| ME-R6500C                         | 300 | 6,5 | 6,08 | +1,71 / -1,32 | 230 | 650 | 1600 | 2020 | 1000 | 650 | 270 | 175    |
| ME-R8000C                         | 280 | 8   | 7,58 | +1,71 / -1,32 | 230 | 650 | 1600 | 2020 | 1000 | 650 | 270 | 192    |
| ME-R5000D                         | 400 | 5   | 4,61 | +1,71 / -1,32 | 230 | 650 | 1600 | 1640 | 1000 | 650 | 270 | 175    |
| ME-R6000D                         | 350 | 6   | 5,61 | +1,71 / -1,32 | 230 | 650 | 1600 | 1640 | 1000 | 650 | 270 | 191    |
| ME-R6500D                         | 400 | 6,5 | 6,11 | +1,71 / -1,32 | 230 | 650 | 1600 | 2020 | 1000 | 650 | 270 | 190    |
| ME-R8000D                         | 350 | 8   | 7,61 | +1,71 / -1,32 | 230 | 650 | 1600 | 2020 | 1000 | 650 | 270 | 219    |

# ME-R



## Accessories for manual winch lifter 200 to 400 kg

**MAX. CAPACITY 400 KG**  
**MAX. ELEVATION 8 M**

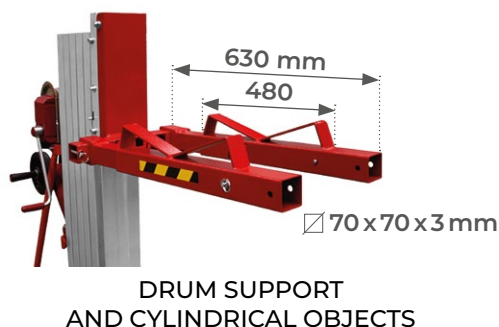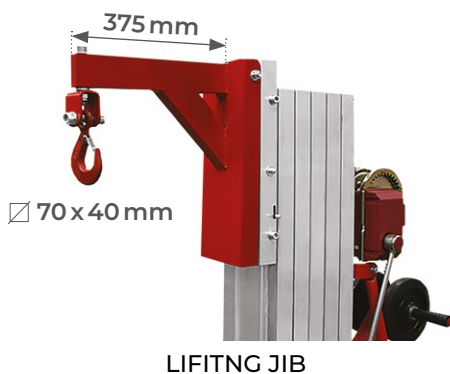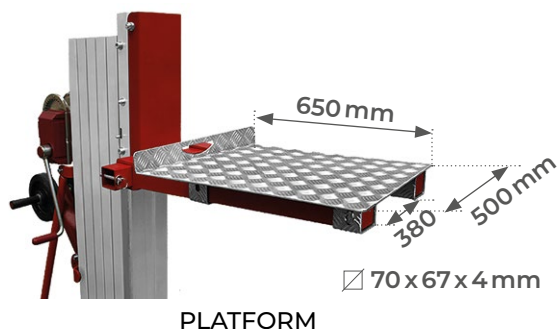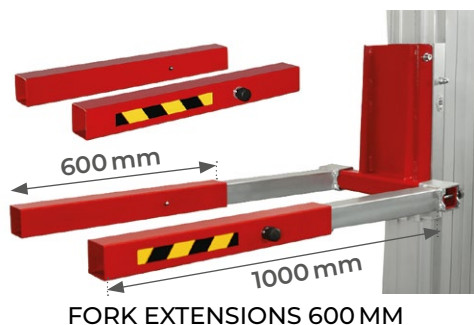

**ACCESSORIES AVAILABLE IN OPTION**

CONTACT US